


Specification	
Max. Print Speed – Mono Grayscale Two-Color	230mm per Second 150mm per Second 120mm per Second
Printing Method	Direct Thermal
Resolution	180 DPI x 180 DPI
Characters Per Line – Font A Font B	42 (80mm) / 37 (58mm) 56 (80mm) / 49 (58mm)
Characters Size – Font A Font B	12 x 24 9 x 17
Paper Roll Type – Width Maximum Diameter Paper Thickness	82 / 80 / 76 / 69 / 57mm ± 0.5mm 83mm 0.06mm ~ 0.1mm
Auto Paper Cutting Method	Auto-Cutter with Selectable Full or Partial Cut
Reliability – MTBF MCBF Printhead Life Cutter Life	360,000 Hours 60,000,000 Lines 150,000,000 Characters 1,500,000 Cuts
Character Set – Alphanumeric International Codepages	95 13 56
Bar Code – 1D 2D	UPC-A / UPC-E / EAN8 / EAN13 / Code39 / Code93 / CODE128 / CODABAR / ITF PDF417 / QR Code / Maxicode / GS1
Interpreter	ESC/POS™
Interface	Parallel
Driver – 32 bit 64 bit 32 bit and 64 bit Other Software Development Kit	Windows XP Prof. / XP Home / 2000 Server / 2000 Professional / POSReady 2009 Windows XP Windows 8.1 / Windows 8 / Windows 7 / Server 2012 / Server 2008 / Server 2003 / Vista Linux CUPS / OPOS / JavaPOS iOS / Android
Drawer Port	1 Port (+24VDC) with Drawer Compulsion
Data Buffer – Receive Buffer RAM RAM Bitmap Flash Bitmap	4 KB RAM Selectable to 64 KB 128 KB 512 KB
Power Supply	AC 100 ~ 240 V, 50/60 Hz Adapter Included
Current/Power Usage	1.5A 24V
Operating Temperature	40° ~ 114°F (5° ~ 45°C)
Operating Humidity	20% ~ 90% RH (Non-Condensing)
Dimensions	5-11/16"W x 5-1/2"H x 7-13/16"D
Ship Weight	7 lbs.
Safety and EMI	FCC / RoHS

## Ports and Connectivity

A DC 24V Power-In      C Parallel Interface  
B Cash Drawer Port      D Cable Clip

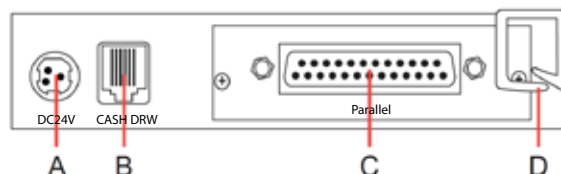

\* Standard configurations shown. Create another configurations by purchasing interface boards separately.



Add : 1911 Hartog Dr. San Jose, CA, 95131  
Tel : 408-452-8788 Fax : 408-452-9788

E-mail : sales@teamresearchinc.com  
Website : www.teamsable.com